


# WOOD HARDENER

## IMPROVES ADHESION OF FILLERS & COATINGS ON INTERIORS & EXTERIORS

- ◆ TOUGHENS ROTTEN WOOD
- ◆ ADHERES TO DAMP WOOD
- ◆ DEEP PENETRATING
- ◆ WATER BASED

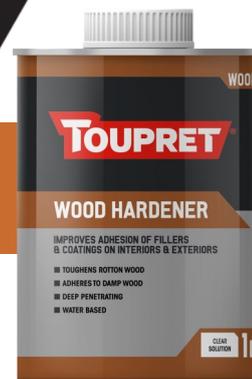

### PURPOSE

Water-based wood hardener treatment for interior and exterior use. Provides improved adhesion when overcoating.

### SUBSTRATES

Wood Hardener can be applied to any types of woods, absorbent wood, dry or damp, including exotic species, chipboard and plywood sanded or stripped beforehand.

### OVERCOATING

Wood Hardener can be overcoated with any Toupret Wood filler, conventional paints, varnishes and stains.

### Physical and technical FEATURES

- Wood Hardener: preparation made of acrylic binders and additives.
- Characterization (NFT 36-005): Family I class 7b2.
- Directive 2004/42/CE: category A/g max 10 g/l
- Mixing rate: ready to use.
- Coverage: about 6 - 8 m<sup>2</sup> per L (depends on the type of wood).
- Setting time: second coat as soon as the filler is hard and dry to the touch.
- Overcoating: can be painted in 24 hours average time (after complete drying).
- Color: white, colourless when dry.

### USE AND STORAGE CONDITIONS

- Application tools: brush or roller.
  - Tool cleaning: after use, clean tools with water.
  - Preservation: guaranteed for 12 months from purchase when used as intended, kept in its original sealed packaging and stored away from sunlight and frost.
- If found to be faulty within the guarantee period, we will arrange a replacement on proof of purchase.

### PACKAGING

Tin: 1L.

### RECOMMENDATIONS and care for use

The times mentioned are indicative and depend on the substrate, coat thickness, and the ambient conditions. Do not apply at a temperature below 5°C or above 35°C nor at a relative humidity over 80%.

### SUBSTRATES PREPARATION

Substrates to be prepared as per the current trade practices. Substrates must be cohesive, clean, sound and dry.

### NORMATIVE DOCUMENTS to be referred to

- NFT 36-005: Characterization of paint products.

### HEALTH AND SAFETY

It is recommended to wear gloves and glasses while applying Wood hardener. Dispose of unused product and packaging responsibly at your local waste collection centre.

Safety data sheet available at [www.toupret.co.uk](http://www.toupret.co.uk)

The data sheet information, especially the guidelines relevant to the application and final use of the product are provided in good faith and result from TOUPRET's experience and knowledge of the products. The product should be used as per the trade practices rules book and in reference to our recommendations. The information provided is relevant to applications processed at a temperature of 20°C, a relative humidity of 50% and on average absorbency substrates. The times mentioned are only indicative and depend on the substrate, the coat thickness, and the ambient conditions.



\* Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale from A+ (very low emissions) to C (high emissions).